

# FUMEX®

## EXHAUST NOZZLES

*Exhaust nozzles for all types of vehicle for manual or automatic disconnection*



Fumex has a complete line of exhaust extraction, adapted to work with stationary vehicles as well as moving vehicles.

For passenger cars, the nozzle is completely in rubber to protect the vehicle.

For trucks and construction equipment nozzles are completely in rubber but also in a combination of metal and rubber.

We also offer a complete program with branch connections and hose break protection.

*The Fumex range also includes fans, accessories and filters suitable for extractor points*

EXHAUST NOZZLE  
Pure advantage

# FUMEX<sup>®</sup> Complete Fumex range of exhaust nozzles for vehicle exhaust fumes.

## Oval rubber nozzle AM 170 & AM 200

AGP rubber nozzle for cars with oval connector, can be connected to a single or dual exhaust pipe, up to 100x 200 mm. The nozzle has a built in hose break protection. Can be affixed using pliers or clamp, co-outlet has a diameter of 22 mm.

- AM without damper
- AMS with tight-fitting damper

Temp. range: -40 ° C to +150 ° C  
Weight: approx. 1.1-2.4 kg

AM 170



AMS 170



AM 200



AMS 200



Item number	Front mm	Back Ø mm
AM 170-075(X)*	170x75	75
AM-170-100(X)*	170x75	100
AM 200-100(X)*	200x100	75
AM 200-125(X)*	200x100	125
AM 200-150(X)*	200x100	
AMS 170-075(X)*	170x75	75
AMS-170-100(X)*	170x75	100
AMS 200-100(X)*	200x100	100
AMS 200-125(X)*	200x100	125
AMS 200-150(X)*	200x100	150

\* (X) T=Pliers K=Clamp

## Exhaust nozzle on tripod AGPF

AGPF nozzle is suitable where the attachment of other nozzles is not possible. Manufactured from galvanized steel. Complete with carrying handle and shock protection with rectangular connection for maximum capture, Temp. range: -50 ° C to +250 ° C  
Weight: approx. 7 kg

Item number	A mm	Ø mm	H mm
AGPF-100	250x200	100	720
AGPF-150	250x200	150	720



# FUMEX® Complete Fumex range of exhaust nozzles for vehicle exhaust fumes.

## Grip nozzle, AT & ATS



Grip nozzle with round opening.  
 Powder coated steel.  
 Rubber impact protector.  
 Supplied with dual outlet

- **AT** without damper
- **ATS** with tight-sealed damper

Temp. range: -30 °C to +200 °C  
 Weight: 1.75–2.5 kg

Item Number		Front	Back
		mm	mm
AT/ATS	125-100	125	100
AT/ATS	125-125	125	125
AT/ATS	160-100	160	100
AT/ATS	160-125	160	125
AT/ATS	160-150	160	150
AT/ATS	160-160	160	160


## Y-shaped hose end, AGK



Branch connection for double exhaust pipes.  
 The branch pipe is made from electrogalvanised steel.  
 AG hose: Flame-retardant, crushable, suitable for vehicle exhaust fumes.  
 Complete with hose clamps.  
 1m hose per branch.  
 Weight: 1.5-3.0 kg

Item No.	A mm
AGK -075	75
AGK -100	100
AGK -125	125
AGK -150	150

## Stacker nozzle, AHM

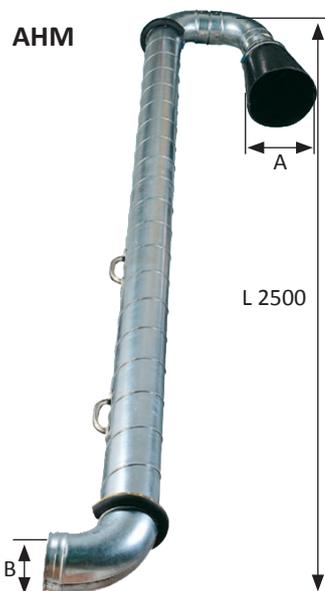

Made from electrogalvanised steel.  
 Complete with lifting handle and impact protection. Rubber funnel in reinforced rubber cloth.  
 Temp. range: -30 °C to +150 °C  
 Weight: approx. 8 kg

Item No.	A mm	B mm
AHM -100	250	100
AHM -125	250	125
AHM -160	250	160

**Pneumatic rubber sleeve, APM/APMO**

The pneumatic nozzle is connected to the exhaust pipe by blowing compressed air into the sleeve which fixes to the pipe. Temp. range: -30 °C till +150 °C (APM), +200 °C (APMO). Max air pressure to sleeve: 0.8 bar.

**Round nozzle**

APM



**For automatic disconnection**

Sleeve in reinforced EPDM rubber. Complete with 45° pipe curve in metal, 0.75 m hose, slide valve, quick disconnect valve and ASK hose break protector.

For fixing to rail solutions, the nozzle is supplemented with a compressed air unit, see the relevant leaflet. Approx. weight 3 kg.

**For manual disconnection**

Sleeve in reinforced EPDM rubber. Complete with 45° pipe curve in metal, 0.75 m hose and slide valve.

For fitting to ASR/ASRM hose roll or ASA balancing block solution, the nozzle is supplemented with a APM 810 compressed air unit containing compressed air hose with swivel and pressure regulator. For fitting to rail solutions, see the relevant leaflet.

Item No.	A mm	B mm
APM 811A	100	75
APM 812A	100	100
APM 813A	125	100
APM 814A	125	125
APM 815A	160	100
APM 816A	160	125
APM 817A	160	150
APM 818A	200	150
Item No.	A mm	B mm
APM 811M	100	75
APM 812M	100	100
APM 813M	125	100
APM 814M	125	125
APM 815M	160	100
APM 816M	160	125
APM 817M	160	150
APM 818M	200	150

**Oval nozzle**

APMO



**For automatic disconnection**

Kevlar reinforced sleeve in EPDM rubber. Complete with integrated 45° bend in rubber, with metal reinforcing rings, 0.75 m hose, slide valve, quick disconnect valve and ASK hose break protector.

For fixing to rail solutions, the nozzle is supplemented with a compressed air unit, see the relevant leaflet. Approx. weight 3.5 kg.

**For manual disconnection**

Kevlar reinforced sleeve in EPDM rubber. Complete with integrated 45° bend in rubber, with metal reinforcing rings, 0.75 m hose and slide valve.

APM 812MC complete with CO tube 6mm quick connection. For fitting to ASR/ASRM hose roll or ASA balancing block solution, the nozzle is supplemented with a APM 810 compressed air unit containing compressed air hose with swivel and pressure regulator. For fitting to rail solutions, see the relevant leaflet.

Item No.	A oval	B mm
APMO 812A	200 × 100	100

Item No.	A oval	B mm
APMO 812M	200 × 100	100
APMO 812MC*	200 × 100	100

\*complete, CO tube with 6 mm quick connection.

**ASK hose break protection**

ASK



Shock-resistant, manufactured in EPDM rubber with stainless steel reinforcing rings. Protects the hose against heavy loads without the hose, nozzle or vehicle being damaged.

Temp. range: -30 °C till +150 °C  
Weight: 1 kg

Item No.	Ø mm
ASK 100	100
ASK 125	125
ASK 150	150