


**2-POST LIFTS**  
Electrohydraulic



 **Ravaglioli**

**RAV**  
**KPH350.40**  
**KPH350.45**

**Electrohydraulic  
2-post lift without base,  
with asymmetric arms  
and symmetric posts  
that enable an easy  
access to the pick-up  
points of the vehicle.**



- Shut-off bar to prevent damage caused by lifting high vehicles.
- Two pistons for intensive use designed to minimise down-time, by requiring little maintenance.
- Mechanical safety latch with automatic engagement ensuring maximum safety when lift is in standing position.
- Manual release by lever.



Arm safety locking with automatic engagement and automatic release when the arm reaches the floor.

### Capacity



**4**

**KPH350.40**  
Recommended  
for lifting cars and  
pickups.



**4.5**

**KPH350.45**  
Recommended for  
lifting vans.

### Scope of delivery:



65 mm  
spacers.

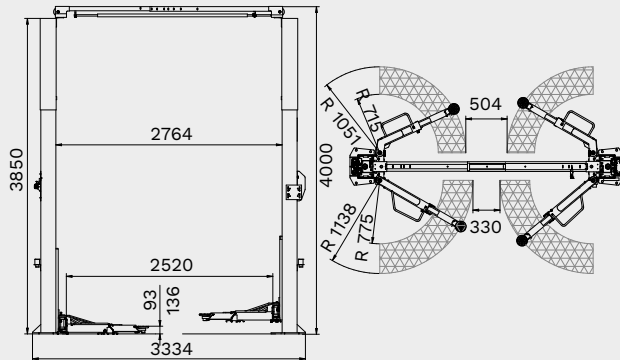
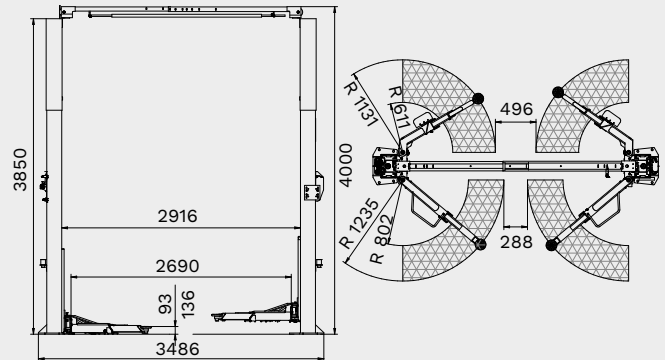
**2**

support brackets  
for spacers.



Powder coating for  
a longer lifetime.

# Technical Data

**Model KPH350.40**

**Model KPH350.45**


KPH350.40	
Item no.	Voltage
KPH-40ECGA	400/50/3ph
KPH-40NCGA	230/50/1ph

KPH350.45	
Item no.	Voltage
KPH-45ECGA	400/50/3ph

	KPH350.40	KPH350.45
<b>Capacity</b>	4,000 kg	4,500 kg
<b>Max. lifting height</b>	1,863 mm (1,928 mm with extensions)	1,863 mm (1,928 mm with extensions)
<b>Lifting time</b>	54 s	54 s
<b>Min. pad height</b>	100 mm	100 mm
<b>Max. pad height</b>	136 mm	136 mm
<b>Column distance (internal)</b>	2,764 mm	2,916 mm
<b>Drive-through width</b>	2,506 mm	2,659 mm
<b>Max. usable height</b>	3,850 mm	3,850 mm
<b>Surface coating</b>	powder coated	powder coated
<b>Arm layout</b>	asymmetrical	asymmetrical
<b>Telescopic front arms</b>	2 stages	3 stages (S)
<b>Telescopic rear arms</b>	2 stages	2 stages (L)
<b>Min. front arm length</b>	715 mm	611 mm
<b>Max. front arm length</b>	1,051 mm	1,131 mm
<b>Min. rear arm length</b>	775 mm	802 mm
<b>Max. rear arm length</b>	1,138 mm	1,235 mm
<b>Width</b>	3,334 mm	3,486 mm
<b>Height</b>	4,000 mm	4,000 mm
<b>Weight</b>	725 kg	750 kg
<b>Forza motrice</b>	2,2 kW	2,2 kW

\* S = short; L = long



#### **RAV Italy**

**Ravaglioli S.p.A.**

Via Primo Maggio 3  
Pontecchio Marconi  
40037 Sasso Marconi BO

☎ +39.051.6781511  
📠 +39.051.846349  
✉ rav@ravaglioli.com

#### **RAV France**

**RAV France SARL**

4, Rue Longue Raie  
ZAC de la Tremblaie  
91220 Le Plessis Pâté

☎ +33.1.60.86.88.16  
📠 +33.1.60.86.82.04  
✉ rav@ravfrance.fr

#### **RAV Germany**

**BlitzRotary GmbH**

Hüfingerring Straße 55  
78199 Bräunlingen  
Germany

☎ +49.771.9233.0  
📠 +49.771.9233.99  
✉ ravid@ravaglioli.com

#### **RAV UK**

**Vehicle Service Group UK Ltd**

3 Fourth Avenue,  
Bluebridge Industrial Estate  
Halstead, Essex, CO9 2SY, UK

☎ +44.1787.477711  
📠 +44.1787.477720  
✉ rav@ravaglioli.com

DRD40U (01)

Technical data and composition presented in this catalogue may vary.  
Pictures reproduced are only indicative.

Member of VSG - Vehicle Service Group  
a **DOVER** company

