



The ERGO LIFT 1000 ROLL is capable of lifting and moving a 2.5 T vehicle, and operates solely on compressed air. The 4 support arms automatically lock, and are adjustable to adapt to all different types of chassis. With a lifting height of 95 cm, the user can work standing up, which reduces fatigue.

- Very compact: 10 cm above the ground in minimum position
- 95 cm maximum lifting height
- Complies with the EN 1493 standard (relating to vehicle lifts)
- Ideal for use in garages where space is limited
- Mobile and easily manoeuvrable with 4 optional wheels
- Load capacity of 2.5 T, factory tested to 3.8 T.



Work in a standing position to help prevent musculoskeletal disorders (MSD).

Extremely stable and robust distortion-free scissor mechanism.

Supplied with 8 rubber pads

x4 4 cm

x4 6 cm

4 optional clip-on wheels (ref. 076778) are available to convert the lift into a trolley. This allows the vehicle to be moved about the workshop with ease.

10 cm

Fits under all vehicles.


Universal maintenance-free hydropneumatic pump.

Handle for adjusting the automatic locking support arms.

The runner can be moved along the support arms to leave the lower section of the vehicle body completely accessible.

Hydraulic protection with an auto-locking scissor in the event of a hose rupture.

All axles are equipped with self-lubricating bronze bushings which makes them maintenance-free.

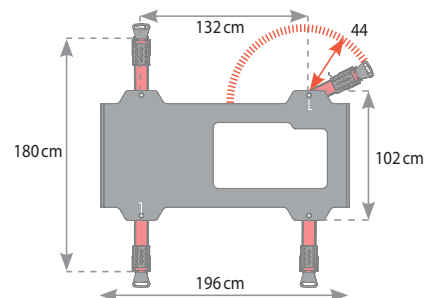

								IP			
	2.5 T	10 cm	95 cm	1 500 kg	2 500 kg	max.	max.	IP54	kg	430 kg	
		minimum	maximum	45 sec.	60 sec.	8 bar	260 cm				