



»» Mobile 2-Post-Lift  
FHB® 3000



- + Mobile and universal use, indoors and outdoors, without fixing on the floor.
- + Free access to any part of the vehicle, doors can be opened at any height.
- + Maximum safety utilizing double load securing with automatic hydraulic and mechanical locks. Automatic locking swivel arms.
- + Hydraulic drive, totally insensitive, minimum maintenance required.



Version FHB3000-SL also suitable for vans



Free access, doors can be opened, no columns




Easily manoeuvrable by one person



Option: Use for washing



Accessory: platforms, capacity 2.75 t

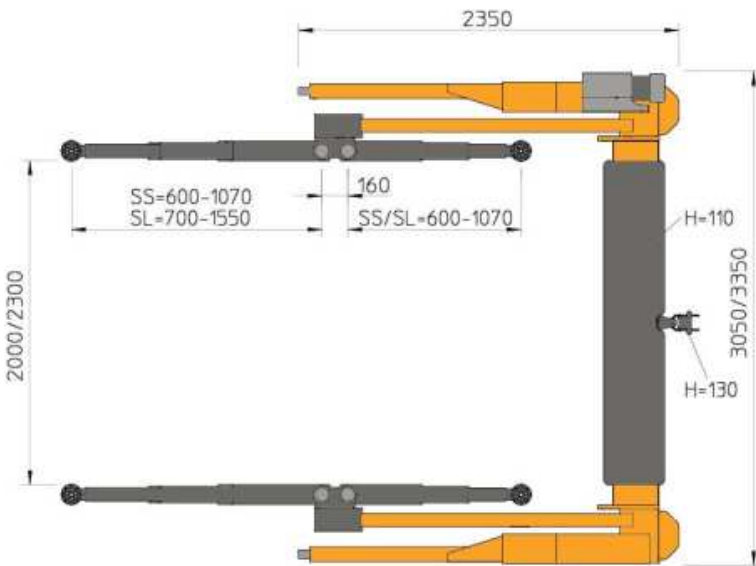

### Technical data – FHB3000

Capacity:	3 t
Load support:	4 swivel arms
FHB3000-SS:	symmetric, 600 – 1070 mm
FHB3000-SL:	asymmetric, front: 600 – 1070 mm rear: 700 – 1550 mm
Lift pad height:	Minimum 110 mm
Lifting height:	1850 mm
Drive-in width:	2000 mm / 2300 mm
Lifting/lowering time:	Approx. 40 sec.
Drive:	Electro-hydraulic
Connection:	400V / 3Ph / 50Hz / 16A
Load securing:	Hydraulic and mechanic
Travelling device:	Detachable wheel handle, 2 wheels
Colour:	Orange RAL2004

# Finkbeiner

Walter Finkbeiner GmbH  
 Alte Poststrasse 9 · 72250 Freudenstadt · Germany  
 Tel +49(0)7441-4031 · Fax +49(0)7441-87778  
 info@finkbeiner.eu · www.finkbeiner.eu

The Finkbeiner company is certified by

